


OPW 61T Drop Tube

The OPW 61T Drop Tube is installed in the fill riser pipe to an underground storage tank. It is designed to transfer product from the fill connection point (between the delivery drop elbow and tight-fill adaptor) to within 6" (or per local requirements) of the bottom of the tank. This allows for submerged filling of the tank, resulting in a more efficient delivery flow rate while reducing the buildup of vapors or foam in the tank.

The 61T-4SC utilizes the 7150-SEGTOOL for assembly.

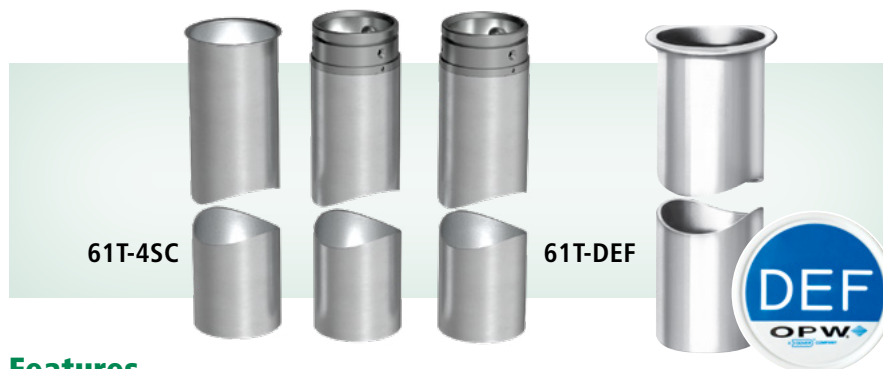

Features

◆ **Now available in segmented version** – the 61T-4SC is able to ship in smaller packaging to help reduce potential damage during transit while enabling more cost-efficient transport and easier storage. Includes 3 segmented tubes.

◆ **.062" Thick Drop Tube Walls** – deter denting and damage to the tube upon installation or removal for long service life.

Segmented 61T-4SC Replacement Tubes

Product #	Product Description
61T-4SC-T1	Segmented Vapor-Tight* 61T Drop Tube. Segment 1 Tube
61T-4SC-T2	Segmented Vapor-Tight* 61T Drop Tube. Segment 2 Tube

Ordering Specifications

Product #	Product Description	in.	mm	lbs.	kg	Drop Tube Length	
						ft.	m
61T-4SC*	Segmented Vapor-Tight 61T Drop Tube	4	102	18	8.16	14	4.27
61T-SS-0417	E85 Stainless Steel 61T Drop Tube	4	102	13	5.9	17	5.19
61T-DEF-0412	DEF Stainless Steel 61T Drop Tube	4	102	6.18	2.8	12	3.66

*CARB EVR Approved

Replacement gaskets for the 61T-4" and the 6150 Series are available. Order the OPW 61TG (4000).

Materials


Body: Aluminum and stainless-steel components

Viton® Base Pad

6111-1400

Features

- ◆ **Viton® Base Pad** – ensures compatibility with current fuel formulations and absorbs impact of wooden gauge sticks to protect the bottom of the tank from punctures
- ◆ **Corrosion-Resistant** – aluminum and stainless-steel components provide for long service life
- ◆ **Unencumbered Vertical Movement** – assures the pad rests on the bottom of the tank and absorbs shock evenly
- ◆ **CARB Approved** – approval Letter #98-12
- ◆ **EVR Approved**

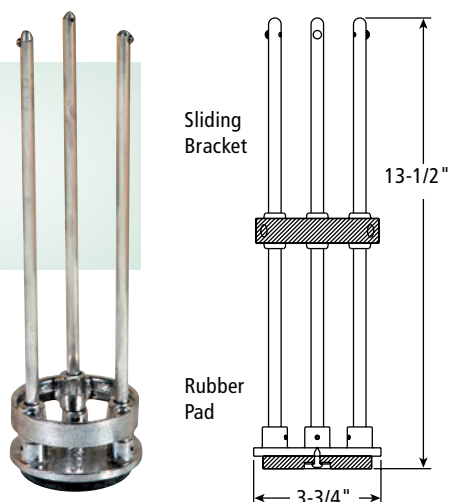

Ordering Specifications

Product #	Height		Diameter		Weight	
	in.	mm	in.	mm	lbs.	kg
6111-1400	13 1/2	343	3 3/4	96	3	1.4

OPW Tank-Bottom Protectors

OPW Tank-Bottom Protectors are installed at the bottom of overfill-prevention valves or drop tubes to help prevent the underground storage tank from damage or leakage at the fill point due to manual tank-gauging with wooden sticks and erosion from dirt or debris.

OPW 6111-1400 Tank-Bottom Protector


The OPW 6111-1400 incorporates a sliding bracket that is pop-riveted to the bottom of the drop tube. This secures the tank-bottom protector to the drop tube for easy, reliable installation and removal for servicing the tank.

Features

- ◆ **Zinc-Plated Steel Cage** – ensures corrosion resistance for long service life
- ◆ **Mesh Screen Design** – helps prevent debris or other foreign matter from obstructing the submersible pump or suction-line foot valve

Ordering Specifications

Product #	Height		Weight	
	in.	mm	lbs.	kg
61TP-2398	4	102	1.02	.46

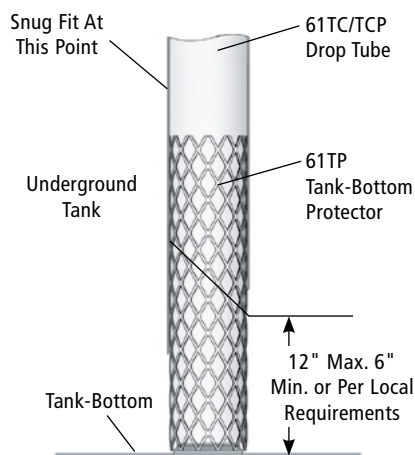

OPW 61TP Tank-Bottom Protector

The OPW 61TP is a flanged, mesh screen design that slides to the bottom of the drop tube. The 61TP is held in place by the flanged spring action of the mesh screen. The mesh screen helps keep debris or other foreign matter from obstructing the submersible pump or suction-line foot valve.

6111-1400 Tank-Bottom Protector Instruction Sheet
Order Number: **H14977PA**